ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	MONO_038-A205	FISHING ROD SPIKE WELDED ASSEMBLY	1
2	MONO_038-A215	ROD REST ASSEMBLY	1
3	MONO_038-P201	ROD GUIDE TOP END CAP	1
4	MONO_038-P204	ROD GUIDE BOTTOM END CAP	1
5	MONO_038-P203	FOOT BAR END CAP	2
6	MONO_038-A225	CAN HOLDER ASSEMBLY	1
7	MONO_038-A230	ACCESSORY ATTACHMENT ASSEMBLY	1
8	MONO_038-P228	BAIT CUP ATTACHMENT	1
9	M6 X 12mm BUT HEAD SCREW	M6 X 12mm BUTTON HEAD SCREW	8
10	M6 X 12 X 1.6 WASHER	M6 WASHER	8

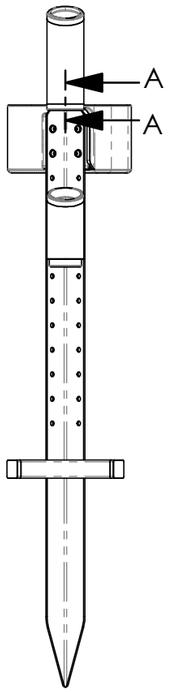

FRONT VIEW



RIGHT VIEW

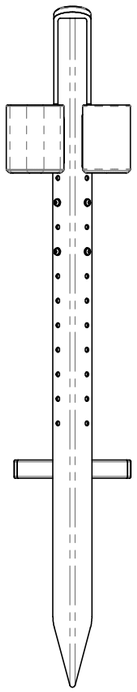

BACK VIEW

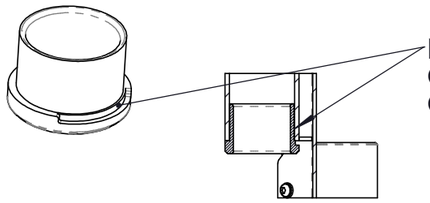

NOTE THAT CUTOUT IN REAR OF ROD GUIDE BOTTOM END CAP (4) SHOULD ALIGN TO INTERIOR OF ASSEMBLY. CUTOUT AFFORDS CLERANCE FROM WELDS.

SECTION A-A
SCALE 1 : 5

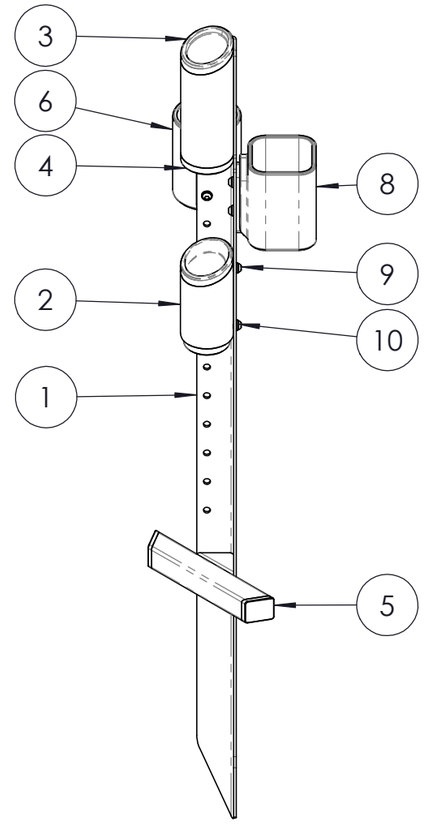

PERSPECTIVE VIEW 1

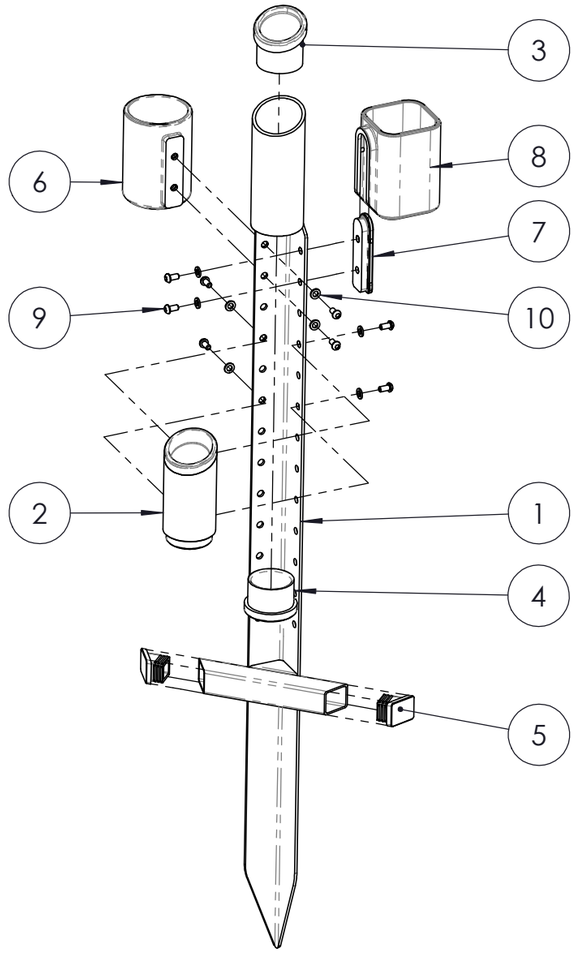

EXPLODED VIEW

TOLERANCES

- Unless otherwise specified (UOS), all dimensions on this assembly drawing are for reference only. The final assembly condition is the result of the accumulated tolerances (stack-up) of the individual manufactured components.
- All components shall be manufactured to the dimensions and tolerances specified on their respective detail drawings.
- Critical interface or functional dimensions on the assembly are identified with a specific tolerance. These dimensions shall be achieved through component tolerancing, assembly processes, or adjustment.
- Mating parts to be free of interference, binding, or misalignment UOS.

DIMENSIONS

- All dimensions are in millimetres unless otherwise indicated.
- Critical inspection dimension: ⬭
- Dimensions with ** may require adjustment during tool trials.
- First article inspection number: ◯ (supplier to provide a report detailing accuracy to each of these dimensions).
- Other dimensions for reference.

GENERAL NOTES

- This drawing to be read in conjunction with all detail drawings and specifications referenced in the Bill of Materials (BOM).
- Fabricate or procure all components as per the BOM.
- Assembly shall be kept clean and free of all dirt, debris, metal chips, and foreign contaminants throughout the build process.
- Refer to individual component drawings for all finishing requirements.
- Remove all burrs and break all sharp edges on components prior to assembly.
- Final assembly shall be free of loose hardware, debris, and foreign objects.
- Final assembly to be free of scratches, tool marks, stains, and other cosmetic defects.
- Workmanship should be consistent with best industry practices.

ASSEMBLY NOTES

- Tighten all threaded fasteners to standard torque values for their size and grade, UOS.
- All moving parts shall operate smoothly and freely through their entire range of motion, without binding.
- All components shall assemble without use of excessive force.

SURFACE TEXTURE KEY

Refer to individual part drawings

--	--	--
--	--	--
--	--	--

#	DESCRIPTION	DATE
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
--	--	--
02	Rod Rest + Spike Updated	17/03/2026
01	Initial Release	15/09/2025

DESIGN INTENT

UOS fabricate per individual part drawings. The 3D model represents the final formed condition for reference.

© COPYRIGHT

This drawing is supplied in confidence. Do not disclose to any third party without prior written consent from Manufacturing Skills Queensland

MANUFACTURING SKILLS QUEENSLAND

monochrome
www.monochrome-design.com

PROJECT NAME	Fishing Rod Spike
DRAWING TYPE	Assembly
DATE CREATED	Monday, 15 September 2025

COLOUR: Refer to Part Drawings
FINISH: Refer to Part Drawings
MATERIAL: Refer to Part Drawings

NOTES:

PART NAME: MONO_038-a200

DESCRIPTION: Fishing Rod Spike Assembly

A3

SHEET 1 OF 1

DO NOT SCALE DRAWING

SCALE:1:10